

WAAS CH 78406 W31A	APP CRS 313°	Rwy Idg 7400 TDZE 1166 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 31
FALLS INTL/EINARSON FLD (INL)



V When local alimeter setting not received, use Baudette alimeter setting: increase LPV DA to 1589 feet and visibility all Cats $\frac{1}{2}$ SM; increase LN/VN/NAV DA to 1627 feet and visibility all Cats $\frac{1}{2}$ SM; increase all MDAs 140 feet and visibility LN/VN Cat C $\frac{1}{4}$ SM and Circling Cat C and D $\frac{1}{2}$ SM. For inop MALSR when using Baudette alimeter setting, increase LPV visibility $\frac{1}{2}$ mile all Cats. For inop MALSR, increase LPV visibility $\frac{1}{2}$ mile all Cats, inop table does not apply to LN/VN Cat D. VDP NA when using Baudette alimeter setting. Baro-VNAV NA when using Baudette alimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LN/VN/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALSR



MISSED APPROACH:
Climb to 3300 direct
HODEV and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

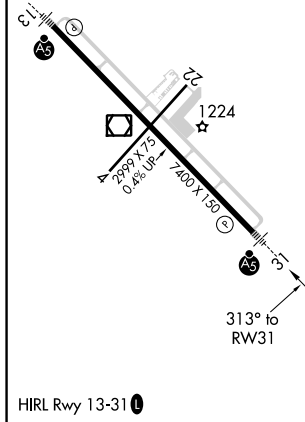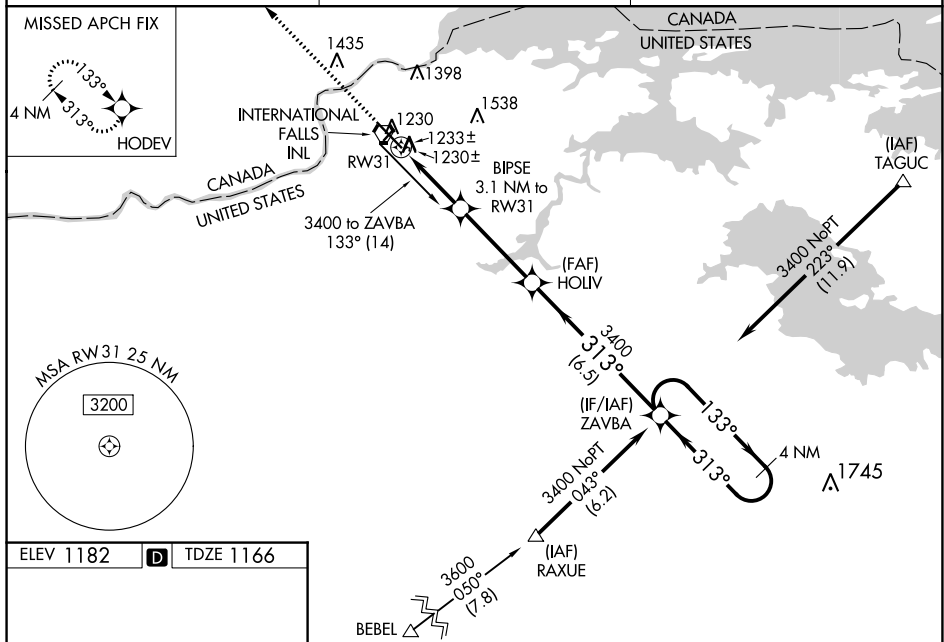

BIPSE
3.1 NM to RW31

HOLIV

ZAVBA

4 NM Holding Pattern

*RNAV only.

0.9 NM to RW31

RW31

2200*

313°

133°

3400

GP 3.00°
TCH 45°

CATEGORY	A	B	C	D
LPV DA		1462-½	296 (300-½)	
LNAV/VNAV	DA	1500-¾	334 (400-¾)	
LNAV MDA		1500-½	334 (400-½)	1500-1 334 (400-1)
CIRCLING	1620-1 438 (500-1)	1680-1 498 (500-1)	1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)