

BAYPO ONE DEPARTURE (RNAV)

D-ATIS
128.475
CLNC DEL
133.6
CPDLC
GND CON
121.7 269.4
TAMPA TOWER
119.5 269.4
TAMPA DEP CON
118.8 239.3

RNAV 1 - DME/DME/IRU or GPS required.

RADAR required.



**TOP ALTITUDE:
6000**

TAKEOFF MINIMUMS

Rwys 1L/R, 10, 19L/R, 28: Standard with minimum climb of 500' per NM to 540.

NOTE: Jets only.

NOTE: WILON TRANSITION for use by aircraft filed to Jacksonville area airports only, or as assigned by ATC.

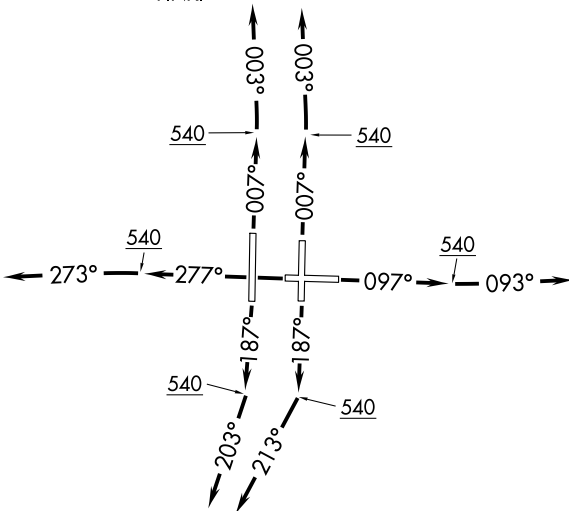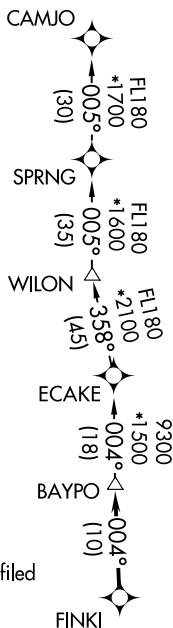

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

BAYPO ONE DEPARTURE (RNAV)

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024

BAYPO ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on heading 007° to 540, then on heading 003° or as assigned by ATC, for vectors to FINKI, thence

TAKEOFF RUNWAY 10: Climb on heading 097° to 540, then on heading 093° or as assigned by ATC, for vectors to FINKI, thence

TAKEOFF RUNWAY 19L: Climb on heading 187° to 540, then on heading 213° or as assigned by ATC, for vectors to FINKI, thence

TAKEOFF RUNWAY 19R: Climb on heading 187° to 540, then on heading 203° or as assigned by ATC, for vectors to FINKI, thence

TAKEOFF RUNWAY 28: Climb on heading 277° to 540, then on heading 273° or as assigned by ATC, for vectors to FINKI, thence

. . . . on track 004° to BAYPO. Maintain 6000. Expect clearance to filed altitude within ten minutes after departure.

CAMJO TRANSITION (BAYPO1.CAMJO)

WILON TRANSITION (BAYPO1.WILON)

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024