


NDB RWY 6



NDB OZ 212	APCH CRS 064°	Rwy Idg 4546 TDZE 298 Arpt Elev 301	AL-577 [USA]	NDB RWT 0 CAIRNS AAF (KOZRY)
▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 1/2 miles. ** Circling to Rwy 24 NA at night.			MALSR 	MISSED APPROACH: Climbing right turn to 2000 via OZR VOR/DME R-162 to REHOB INT and hold; or when directed by ATC, climbing left turn to 2000 heading 290° within 10 NM (RADAR required).

ATIS	APP CON			TOWER ★	GND CON	CLNC DEL	PAR
111.2	125.4	327.125	(021°-120°)	135.2 (CTAF)	121.9	118.075	
	133.75	270.35	(121°-219°)				
316.15	133.45	239.275	(220°-340°)				
	121.1	319.25	(341°-020°)	248.55	288.25	380.1	

Visibility reduction by helicopters NA.

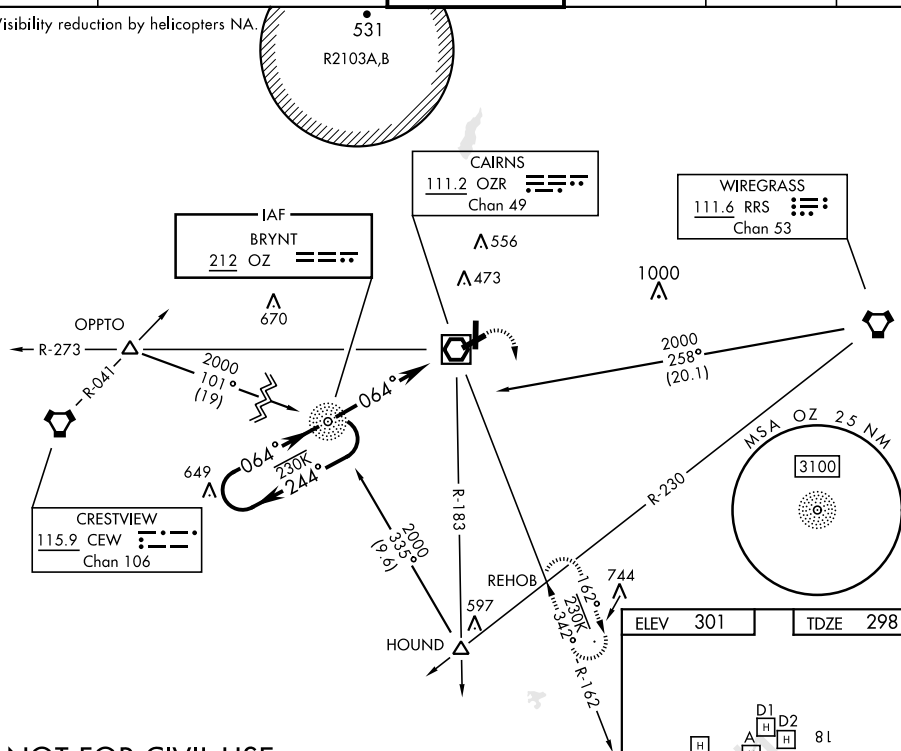

NOT FOR CIVIL USE

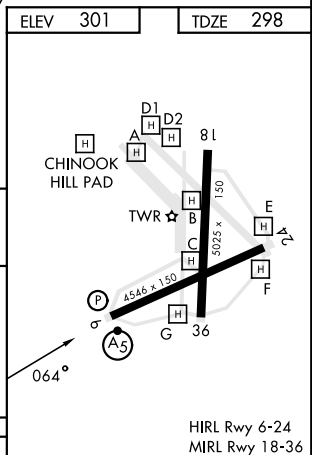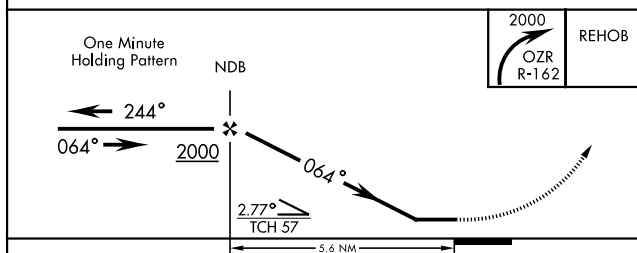

CATEGORY	A		B		C		D		MIRL Rwy 18-36					
S-6 *	800/40	502 (500-¾)	800/55	502 (500-1)	FAF to MAP 5.6 NM									
CIRCLING**	800-1 499 (500-1)	820-1 519 (600-1)	900-1½ 599 (600-1½)	900-2 599 (600-2)	Knots	60	90	120	150	180				
					Min:Sec	5:36	3:44	2:48	2:14	1:52				